

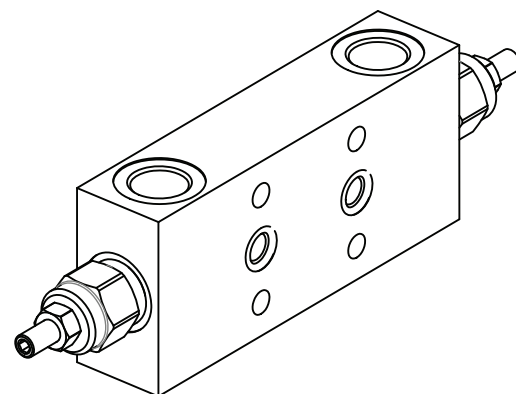


## Dimensions

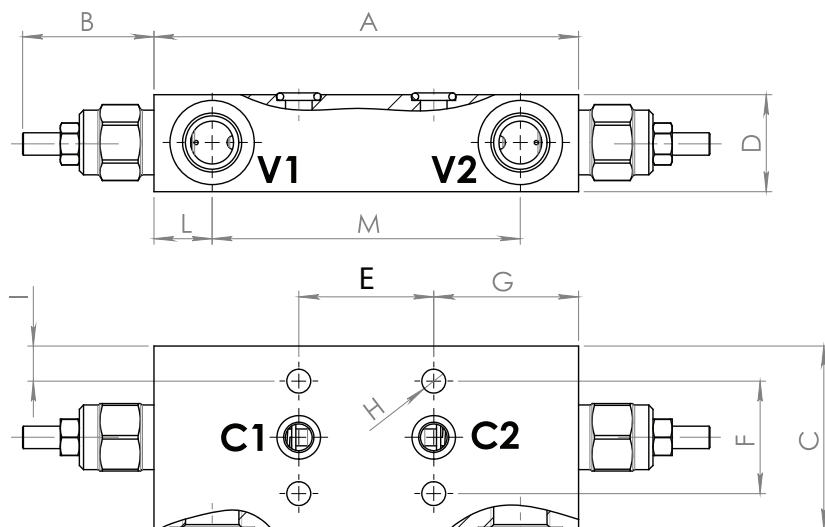


| Size | A   | B max | C  | V1-V2 bsp | D    | E  | F  | G    | H   | I    | L    | M     | Weight kg |
|------|-----|-------|----|-----------|------|----|----|------|-----|------|------|-------|-----------|
| 02   | 151 | 47    | 55 | 3/8       | 29,5 | 48 | 40 | 51,5 | 8,5 | 7,5  | 20,7 | 109,6 | 1,90      |
| 03   | 151 | 47    | 65 | 1/2       | 34,5 | 48 | 40 | 51,5 | 8,5 | 12,5 | 20,7 | 109,6 | 2,57      |

## Hydraulic Symbol



## Curves

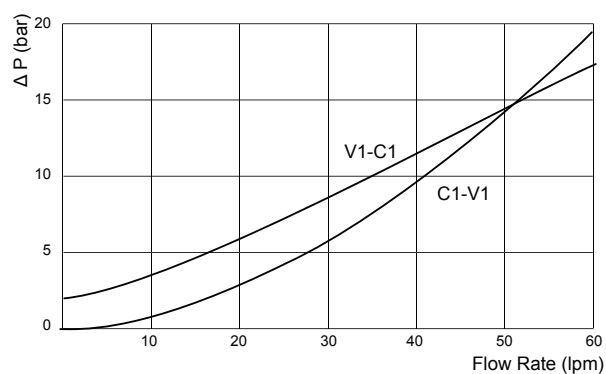

## Features

|              |         |
|--------------|---------|
| Rated Flow   | 60 lpm  |
| Max Pressure | 350 bar |

**Materials:** Zinc plated steel manifold, hardened steel inner parts.

**Notice:** Relief setting at least 1,3 times the highest expected load-induced pressure.

## Ordering Code

|              |    |    |   |
|--------------|----|----|---|
| <b>CBDLF</b> | -- | -- | - |
|--------------|----|----|---|

| Port Size BSP |     | Spring               |                     |                                |
|---------------|-----|----------------------|---------------------|--------------------------------|
|               |     | Pressure Range (bar) | Increase (bar/turn) | Standard Setting (bar) Q=5 lpm |
| 02            | 3/8 |                      |                     |                                |
| 03            | 1/2 |                      |                     |                                |
| 20            |     | 60 - 210             | 61                  | 180                            |
| 30            |     | 100 - 350            | 100                 | 250                            |

| Pilot Ratio |         |
|-------------|---------|
|             | 4,2 : 1 |
| 8           | 8 : 1   |

**Ordering Code Example:** CBDLF0330 = 1/2 BSP Ports - 100-350 bar setting range, 4,2:1 Pilot Ratio.