



CSL 1 and CSLV 1

THERMIC EFFICIENCY FOR 12-24 DC

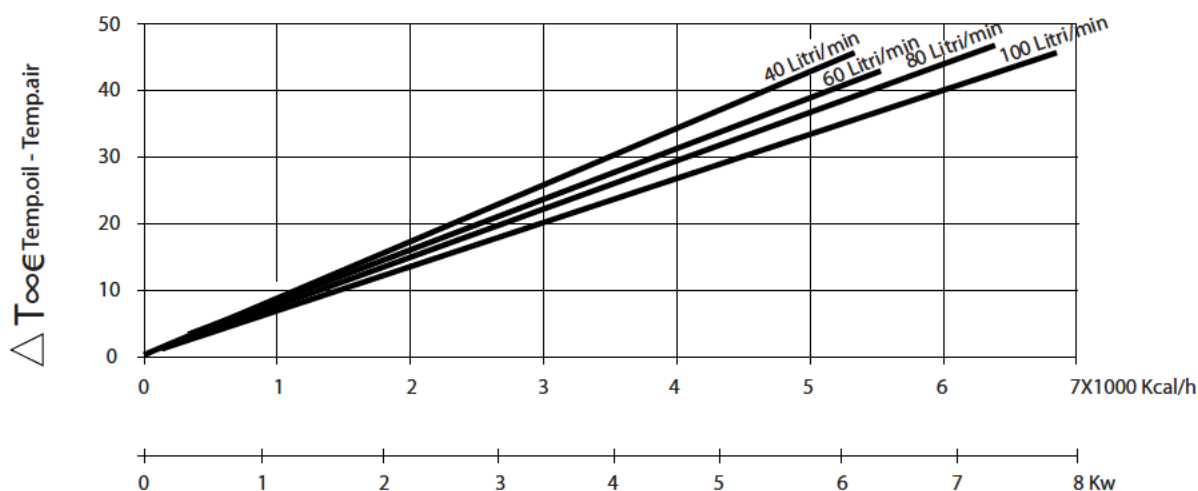

THERMIC EFFICIENCY FOR 22-38 AC

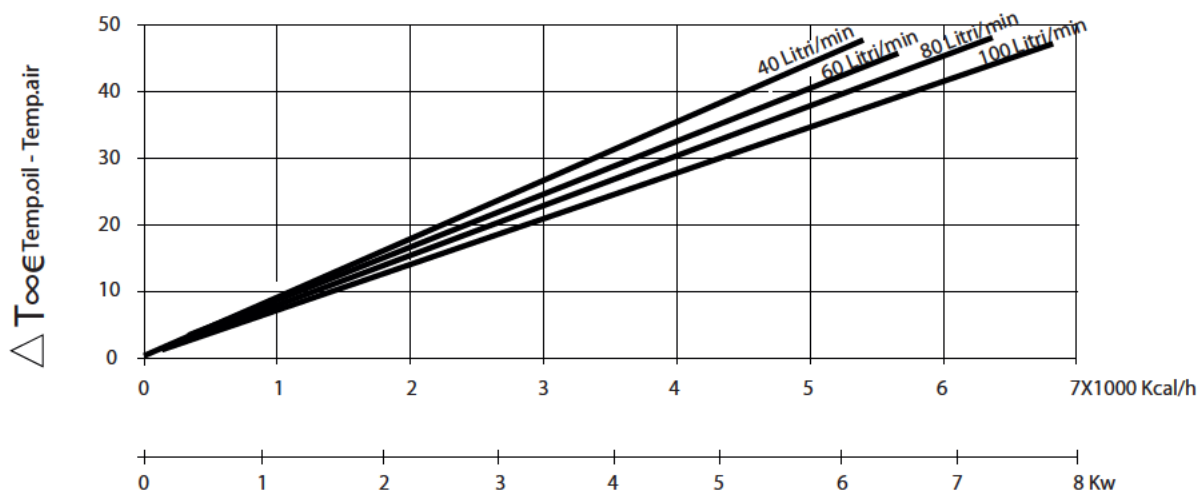

PRESSURE DROP

In order to know different viscosity, please multiply cst x C correction factor

cst	10	15	20	30	40	50	60	80	100	200	300
C	0,4	0,64	0,76	1,0	1,1	1,3	1,5	1,8	2,0	3,2	4,4

