


HVC6系列 二位三通电磁换向阀

HVC6 SERIES DIRECTIONAL VALVES LINE MOUNTING

符号 SYMBOL

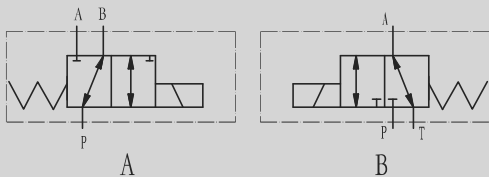

技术参数 Technical data

型号 Model	HVC6
最大流量 (L/min) Max Flow rate (L/min)	50
最大工作压力 (Mpa) Max operating pressure(MPa)	25
阀体 (材料) 表面处理 Valve body (Material) Surface treatment	(铸件) 表面磷化处理 / (casting) phosphating surface
油液清洁度 Oil cleanliness	NAS1638 9 级和 ISO4406 20/18/15 级 NAS1638 class 9 and ISO4406 class 20/18/15

特性曲线 (在使用 HLP46 , 油温=40 °C ± 5 °C 时测得)

Characteristic curves (measured with HLP46 , $V_{oil}=40\text{ }^{\circ}\text{C} \pm 5\text{ }^{\circ}\text{C}$)

流量-压力损失曲线

