



EJ08F type



directional solenoid valve - 3 way / 2 positions

- Direct acting
- Spool type
- Suitable for low pressure: 50 bar (725 psi)

Technical specifications and diagrams are measured with mineral oil of 46 cSt viscosity at 40°C (104°F) temperature.



EJ08F		
Nominal flow		12 l/min (3.17 US gpm)
Max. pressure		50 bar (725 psi)
Oil leakage	at 50 bar (725 psi)	5 cm ³ /min (0.30 in ³ /min)
Fluid		mineral based oil
Viscosity		10-200 cSt
Max level of contamination		18/16/13 ISO4406
Fluid temperature	with NBR seals	from -20°C (-4°F) to 80°C (176°F)
	with FPM seals	from -20°C (-4°F) to 100°C (212°F)
Environmental temp. for working conditions		from -20°C (-4°F) to 50°C (122°F)
Cavity		SAE 08/3
Coil type*		BT
Nominal voltages		12 VDC - 24 VDC ± 10%
Power rating		21 W
Weight		0.175 kg (0.38 lb)

NOTE - For different conditions, please contact Walvoil Sales Dpt. - *For coils further features see from page 206.

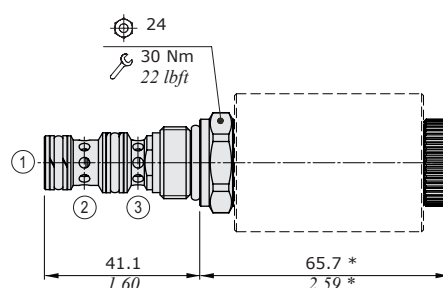

NOTE (*): dimension for configuration **EJ08F/20NB**, for dimensions with different type of emergency see page 213.

Ordering codes and description composition

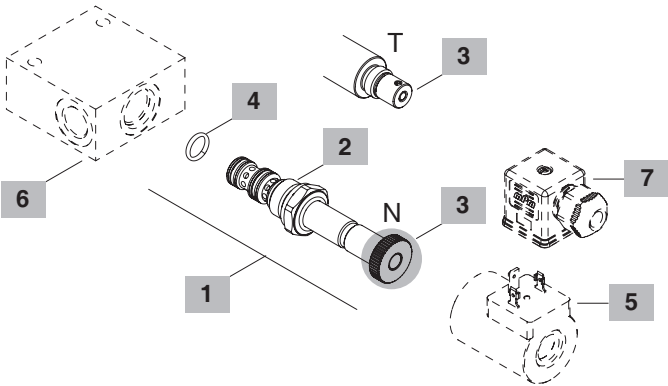

1 Cartridges

TYPE	CODE	DESCRIPTION
SAE cavity 08/3		
EJ08F/20NB	0EJ08002029	Without emergency
EJ08F/20TB	0EJ08002043	Screw type emergency

2 Spool

TYPE	DESCRIPTION
2	Spool 2

3 Emergency

TYPE	DESCRIPTION
N	Without emergency
T	Screw type

4 Seals

TYPE	DESCRIPTION
B	NBR (Buna) o-ring seals, std configuration
V	FPM (Viton) o-ring seals, contact Sales Dept.

5 Coils

TYPE	CODE	DESCRIPTION
BT 12VDC	4SL3000120	12VDC-ISO4400 coil

For complete coils list see from page 206

6 Valve body

TYPE	CODE	DESCRIPTION
SAE 08/3-G 3/8	3CC0830C11	Aluminium body for cavity 08 valve, G3/8 std thread

For steel bodies or different threading see from page 217

7 Connector

TYPE	CODE	DESCRIPTION
ISO4400	4CN1009995	Connector

For complete connectors list see from page 206

Rating diagrams

