

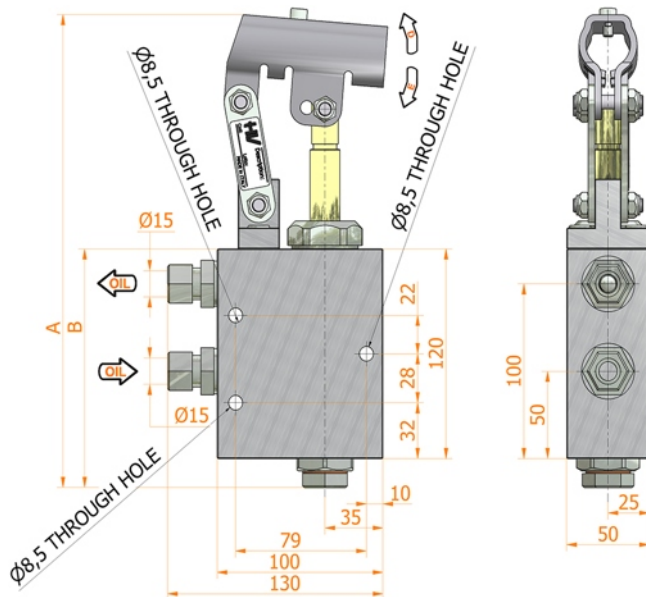


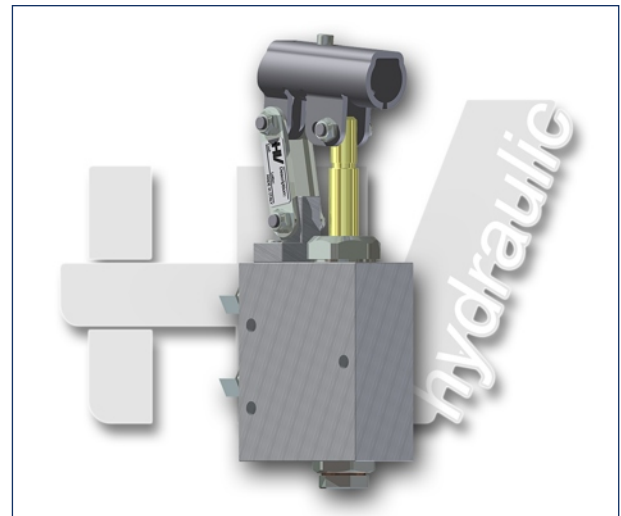

PMP 25 e

without release hand knob
 double acting hand pump for a single acting cylinder
 for fixing to a wall

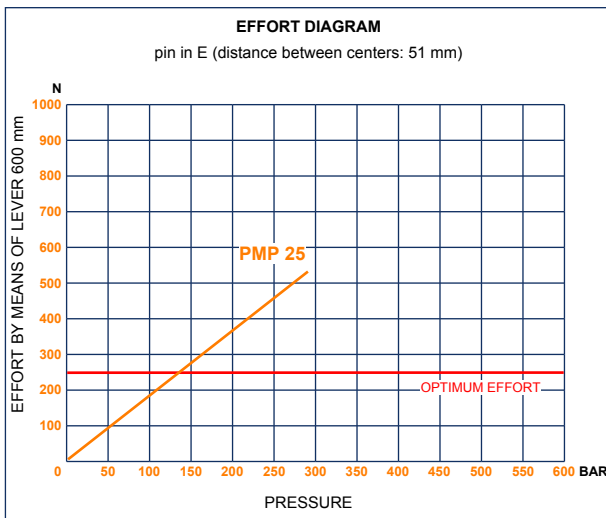

Specifications:

- Anticorodal aluminium body
- Piston treated with Niploy 30 micron for high resistance in salt spray conditions.
- **Stainless steel** support lever
- Lever connection Ø 27
- White **zinc plated** external parts

DISPLACEMENT cm ³	A mm	B mm	C mm	D °	E °	ACTUAL DISPLACEMENT cm ³	PRESSURE BAR		MASS KG	CODE WITHOUT BELLOWS	CODE WITH BELLOWS
							OPTIMAL	MAX			
25	270	136	--	26	29	24,285	120	280	3,000	6075.0001	--