




SIGHT GLASS - SGP


- SHOCK RESISTANT
- TRANSPARENT POLYAMIDE LENS
- OPERATING TEMP. 80 deg C
- BUNA - N SEAL
- FOR USE WITH MINERAL , PETROLEUM & WATER BASED FLUIDS
- ANY CONTACT WITH ALCOHOL OR SOLVENTS MUST BE AVOIDED

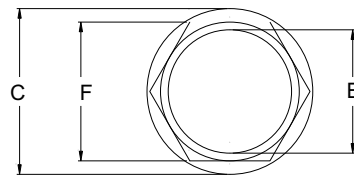

SIGHT GLASS

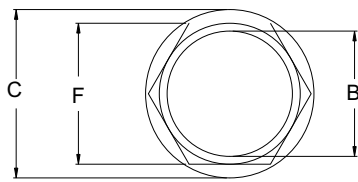

SAE. THD



BSPP THD




WELD FLANGE

PART NO	A	B	C	D	E	F	* WELD FLANGE TO SUIT
SGP-06B	3/4" BSPP	21	35	12	8	30	TWF.06B
SGP-08B	1" BSPP	32	43	12	11	35	TWF.08B
SGP-10B	1-1/4" BSPP	33	51	16	10	42	TWF.10B
SGP-12B	1-1/2" BSPP	40	58	20	10	50	TWF.12B
SGP-08S	3/4"-16 UNF	19	26	9.5	10.5	22	TWF.08U
SGP-12S	1-1/16"-12 UNF	27	38	15	10	30	TWF.12U

MODEL CODE

SGP	- 08 B	**
SERIES	SIZE THREADS	SPECIAL FEATURE
SGP	06B 3/4" BSPP	X - NO REFLECTOR
	08B 1" BSPP	
	10B 1-1/4" BSPP	
	12B 1-1/2" BSPP	
	08S 3/4"-16 UN	
	12S 1-1/16"-12 UN	



* . REFER TO TWF DATA SHEET / TO BE ORDERED SEPERATELY